
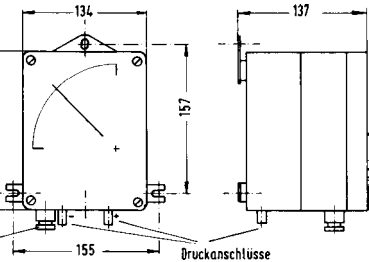
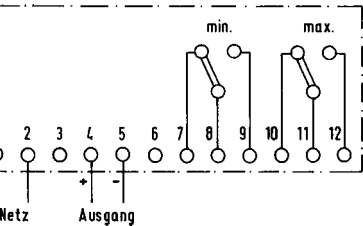





# Differential pressure indicator Peritact 80

Device	Description	Order No.	Price EUR
<p><b>PERITACT 80</b> wall mounting device</p>  <p><b>Physical dimensions</b></p>  <p><b>connection diagram</b></p>  <p><b>connection diagram</b> Two-wire transmitter</p> 	<p>Indicator with lead diaphragm element for indication, signaling and transmitting pressure, underpressure, or differential pressure of non-aggressive gases. Devices for measuring flow in accordance with the active pressure procedure are available with quadratic scale.</p> <p>range lowest span: wall mounting case 50 Pa  range highest span: 10000 Pa  overpressure protection: at least up to 10-fold of measuring range</p> <p>static pressure: max. 0,2 bar  pressure connections: hose liners 8 mm ø  electrical connections: screw-clamps  supply voltage: 230 V or 24 V, 50 c/s,  with two-wire system 13...30 V dc</p> <p>output: 0/4...20 mA or 0...10 V  with supply voltage or  4...20 mA with two-wire system</p> <p>limit values: 2 nominal value indicators  adjustable or the complete range,  each limit value 1 relay with throw-over switch</p> <p>max. contact load: 250 Vac, 6 A, non-inductive  wall mounting case: plastic (ABS), protection class IP65,  size 155 x 175 x 137 mm (w x h x d)</p> <p>ambient temperature: 0...50 °C  weight: approx. 1,5 kg  EMC: Test according to EN 50081-2,  EN 50082-2, CE-sign</p> <p>tolerance limit: ± 1,5 %</p> <p><b>Indicator Peritact 80, wall mounting, Range:.....</b> <b>2415</b></p> <p><b>Indicator Peritact 80 with min.- and max.- contact</b> <b>2425</b>  supply voltage 230 V or 24 V, 50 c/s  wall mounting, <b>Range:.....</b></p> <p><b>Indicator Peritact 80 with electrical output signal</b> <b>2435</b>  <b>0/4...20 mA or 0...10 V</b>, supply voltage 230 V or 24 V, 50 c/s  wall mounting, <b>Range:.....</b></p> <p><b>Indicator Peritact 80 with electrical output signal</b> <b>2445</b>  <b>0/4...20 mA or 0...10 V as well with min.- and max.-contact</b>  supply voltage 230 V or 24 V, 50 c/s  wall mounting, <b>Range:.....</b></p> <p><b>Two-Wire transmitter MZP80, output 4...20 mA</b> <b>7320</b>  supply voltage 13...30 V dc  wall mounting, <b>Range:.....</b></p> <p>accessories  <b>Mounting set P80</b> <b>24003</b>  <b>Plastic tube KS 7 x 1,5 mm</b> <b>24004</b>  <b>Throttle nozzle Da</b> <b>24005</b>  <b>Connection supply Asi-P80, female thread R 3/8"</b> <b>24006</b>  <b>Connection supply Asa-P80, male thread R3/8"</b> <b>24008</b></p> <p>extra charge  <b>range &lt; 100 Pa</b> <b>24010</b>  <b>range &gt; 5000 Pa</b> <b>24007</b></p>		

subject to change without notice

gkg1e0406